

LWPF1 PRESS FORCE LOAD CELL (U.S. & METRIC)

FEATURES & BENEFITS

- Capacities from 2 to 100 kN (450 to 22.5K lbf)
- Short height
- Large thru-hole
- For press-force monitoring

SPECIFICATIONS

ACCURACY – (MAX ERROR)		
Nonlinearity – %FS		±0.5
Hysteresis – %FS		±0.5
Nonrepeatability – %RO		±0.1
Creep, in 30 min – %		±0.1
TEMPERATURE		
Effect on Zero – %RO / deg	°C	±0.02
Effect on Output – % / deg	°C	±0.02
Compensated Range	°C	0 to +60
	°F	+32 to +140
Operating Range	°C	-10 to +70
	°F	+14 to +158
ELECTRICAL		
Output – mV/V		1 ±20%
Excitation Voltage – VDC		2 - 12
Bridge Resistance – Ohm		700
Electrical Connection – Cable	m	3
	ft	10
MECHANICAL		
Safe Overload – %RO		150
Deflection at Rated Capacity	mm	< 0.15
	in	< 0.006
IP Rating		IP60
Material		Stainless steel / Aluminum

OPTIONS


- Extended temperature range (-40 to +150°C or -40 to +302°F)
- Internal shunt resistor – 100% output

STANDARD CONFIGURATION




Model LWPF1 (Shown)

LOADING DIAGRAM

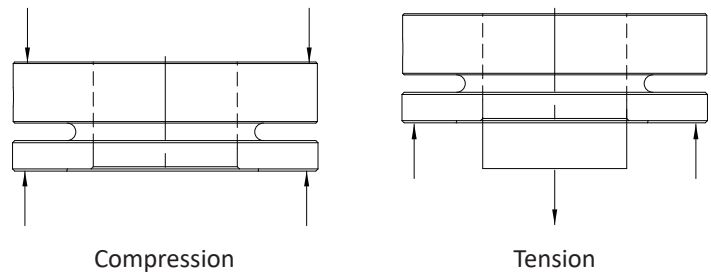

Note: Loading on this transducer must take place through connections with the mounting holes

LWPF1 PRESS FORCE LOAD CELL (U.S. & METRIC)

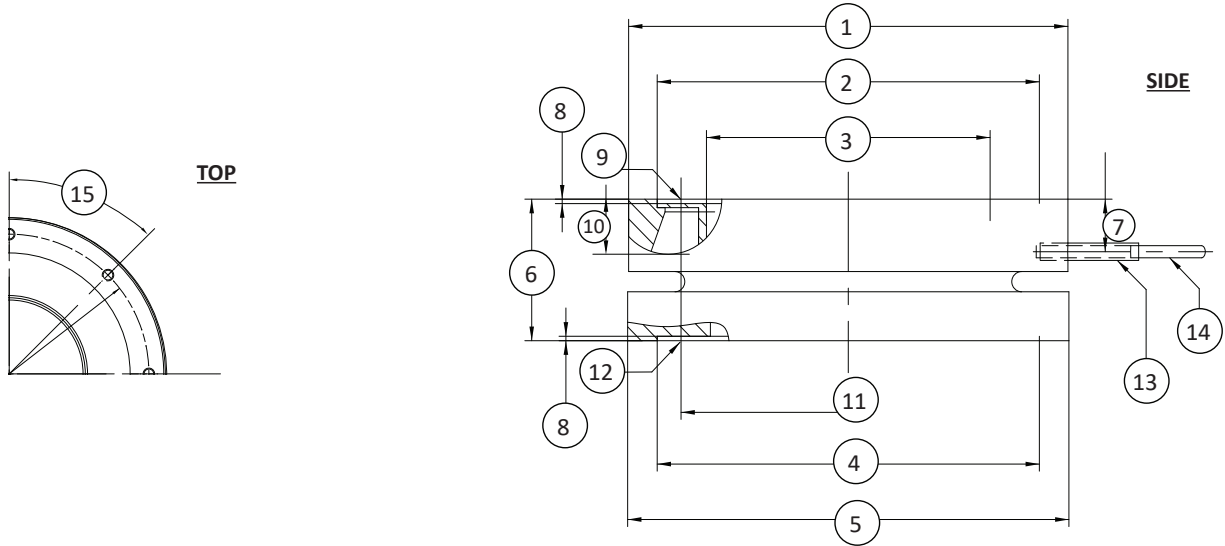

DIMENSIONS

See Drawing	CAPACITY			
	Metric (kN)	U.S. (lbf)	Metric (kN)	U.S. (lbf)
	2, 5, 10, 20	450, 1.12K, 2.25K, 4.5K	50, 100	11.2K, 22.5K
	mm	in	mm	in
(1)	69.7	2.74	111.5	4.39
(2)	54	2.1	97	3.8
(3)	33	1.3	70	2.8
(4)	54	2.1	97	3.8
(5)	70g6	(2.7555/2.7548)	112g6	(4.4090/4.4081)
(6)	25	1.0	35	1.4
(7)	9	0.4	13	0.5
(8)	0.5	0.02	1.1	0.04
(9)	M5, 8 x 45°		M6, 8 x 45°	
(10)	5	0.2	6	0.2
(11)	62	2.4	104	4.1
(12)	M5, 8 x 45°		M6, 8 x 45°	
(13)	18 ^{±3}	0.7 ^{±0.1}	18 ^{±3}	0.7 ^{±0.1}
(14)	Ø3.2	Ø0.13	Ø3.2	Ø0.13
(15)	45°		45°	