

# High-frequency, integral cable accelerometers

## 997 series

### SPECIFICATIONS

Sensitivity, $\pm 10\%$ , 25°C		10 mV/g
Acceleration range		600 g peak
Amplitude nonlinearity		1%
Frequency response:	$\pm 5\%$	1.5 - 20,000 Hz
	$\pm 10\%$	1.0 - 25,000 Hz
	$\pm 3$ dB	0.5 - 29,000 Hz
Resonance frequency, mounted		>45 kHz
Transverse sensitivity, max		3% of axial
Temperature response:	-55°C	+1%
	-25°C	-1%
	+120°C	+8%
Power requirement:		
Voltage source		18 - 30 VDC
Current regulating diode		2 - 10 mA
Electrical noise, equiv. g, nominal:		
Broadband	2.5 Hz to 25 kHz	1,000 $\mu$ g
	10 Hz	25 $\mu$ g/ $\sqrt{\text{Hz}}$
	100 Hz	9 $\mu$ g/ $\sqrt{\text{Hz}}$
	1,000 Hz	7 $\mu$ g/ $\sqrt{\text{Hz}}$
Output impedance, max		100 $\Omega$
Bias output voltage, nominal		12 VDC
Grounding		case isolated, internally shielded
Turn-on time		<1 sec
Temperature range		-50° to +120°C
Vibration limit		1,000 g
Shock limit		5,000 g peak
Sealing		hermetic
Base strain sensitivity, max		0.0005 g/ $\mu$ strain
Weight		35 grams
Case material		316L stainless steel
Mounting:	997	8-32 captive screw
	997-M4	M4 captive screw
Integral cabling		J10, 16 ft., Enviroprene, two-conductor shielded

Accessories supplied: Captive screw (type depends on model); calibration data (level 2)

Options: Cable length




20017 Rho (Mi) - via Magenta, 77 - Edif. 6  
Tel. 02 36569371 - Fax 02 36569382  
@: info@danetech.it - web: www.danetech.it



### Key features

- Available models: 997 (8-32 captive screw) and 997-M4 (M4 captive screw)
- High amplitude range
- Manufactured in ISO 9001 facility

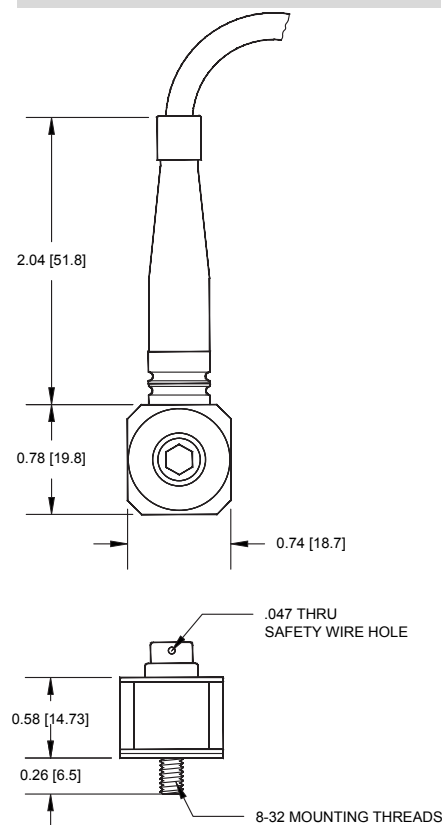

Connections	
Function	Cable conductor color
power/signal	white
common	black
case	shield



Note: Due to continuous process improvement, specifications are subject to change without notice.  
This document is cleared for public release.

Wilcoxon Sensing Technologies

An Amphenol Company

8435 Progress Drive  
Frederick, MD 21701  
USA

Tel: +1 (301) 330-8811  
Fax: +1 (301) 330-8873  
[info@wilcoxon.com](mailto:info@wilcoxon.com)

[www.wilcoxon.com](http://www.wilcoxon.com)