


High Precision Flow Turbine Meter


VCT Series



Calibrated frequency output (TTL)



Temperature probe
media exposed



Identification memory

Functional description

The VCT rotor geometry is further optimized and supported by a high-performance hybrid ball bearing. Those improvements resulting in a wide turndown and excellent repeatability. The turbine speed is detected with no drag to the rotor and converted into a common TTL frequency output. A miniaturized media exposed probe take accurate dynamic readings of process media temperature. VCT defaults and calibration data are stored within an integrated data memory. Combined with the smart flow computer VCA or VCA-T series a plug and play flow measuring systems is operating at high accuracy and independent from fluid viscosity.

Flow ranges and process connections

see table

Output signal flow

Frequency 2 kHz (TTL) max

Metrological properties Flow

(at viscosity 1 mm²/s, app.)

Repeatability ±0.025% of reading

Response time 2 ms app.

Metrological properties Temperature

Isolated thermocouple T-type (DIN EN 60584 class 2)

Supply voltage

9 to 32 V DC reverse polarity protected

Power consumption

≤ 8 mA

Material wetted parts

stainless steel and ceramic

Operating temperature range

Process media -40°C to +150°C

Ambient -40°C to +125°C

Process pressure at +20°C

25 bar max., others on request

Electrical connection

high temperature shielded cable, length 50 cm with push-pull connector size 0

Degree of protection

IP67

EMC

EN 55011

EN 61000-4-2 to EN 61000-4-6


Calibration certificate

included

Accessories

high temperature shielded cable, length 5 m to connect VCT turbine meter with VCA or VCA-T flow computer, other accessories see separate data sheet

Dimensions (mm)

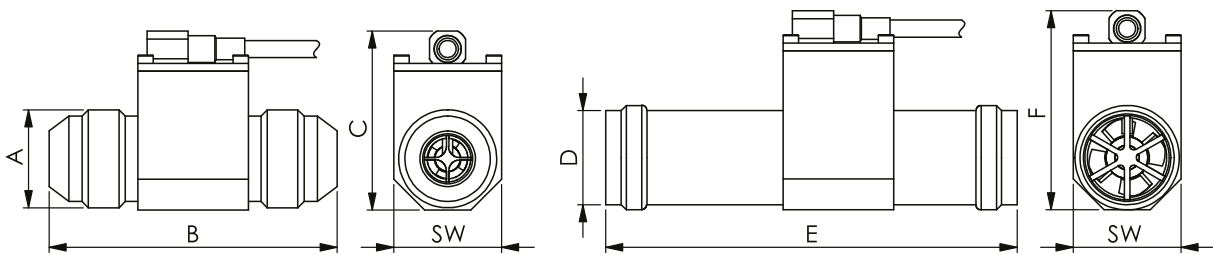

Type	Inner-Ø [mm]	Range		AN-thread				Hose Barb				SW [mm]	Filter [µm]	
		min. [Lit./Min.]	max. [Lit./Min.]	A	B [mm]	C [mm]	mass [g]	D [mm]	E [mm]	F [mm]	mass [g]			
VCT														
0005	6,8	0,05	5	AN8	56	35	140	9,8	56	29,9	85	21	10	
0010	6,8	0,1	10	AN8	56	35	140	9,8	56	29,9	85	21	10	
0020	7,9	0,2	20	AN8	56	35	140	12,0	56	31,6	100	21	10	
0030	9,9	0,3	30	AN8	56	35	140	13,0	56	33,0	105	21	10	
0060	12,3	0,6	60	AN10	69	38	190	15,4	69	35,5	130	21	10	
0100	15,5	1,0	100	AN12	80	43	280	18,3	80	39,0	140	21	10	
0250	21,4	2,0	250					25,0	96	45,0	210	27	20	
0350	27,4	3,0	350					32,0	108	48,5	260	32	20	