

Integral cable accelerometer

786F



SPECIFICATIONS


Sensitivity, $\pm 5\%$, 25°C	100 mV/g
Acceleration range	80 g peak
Amplitude nonlinearity	1%
Frequency response, nominal:	$\pm 10\%$ 1 - 8,000 Hz ± 3 dB 0.5 - 13,000 Hz
Resonance frequency	30 kHz
Transverse sensitivity, max	5% of axial
Temperature response:	-50°C -5% +120°C +5%
Power requirement:	
Voltage source	18 - 30 VDC
Current regulating diode	2 - 10 mA
Electrical noise, equiv. g:	
Broadband 2.5 Hz to 25 kHz	700 μ g
Spectral 10 Hz	10 μ g/ $\sqrt{\text{Hz}}$
100 Hz	5 μ g/ $\sqrt{\text{Hz}}$
1,000 Hz	5 μ g/ $\sqrt{\text{Hz}}$
Output impedance, max	100 Ω
Bias output voltage	12 VDC
Grounding	case isolated, internally shielded
Temperature range	-50° to +120°C
Vibration limit	500 g peak
Shock limit, min	5,000 g peak
Electromagnetic sensitivity, equiv. g, max	70 μ g/gauss
Sealing	hermetic
Base strain sensitivity, max	0.0002 g/ μ strain
Hydrostatic pressure	100 psi
Sensing element design	PZT ceramic / shear
Weight	90 grams (excluding cable)
Case material	316L stainless steel
Mounting	1/4-28 UNF tapped hole
Integral cabling	J9T2A, 16 ft., blunt cut

Accessories supplied: SF6 mounting stud; calibration data (level 2)



Key features

- Certified versions available for use in hazardous areas
- Usable in submerged applications up to 30 ft.
- Manufactured in ISO 9001 facility

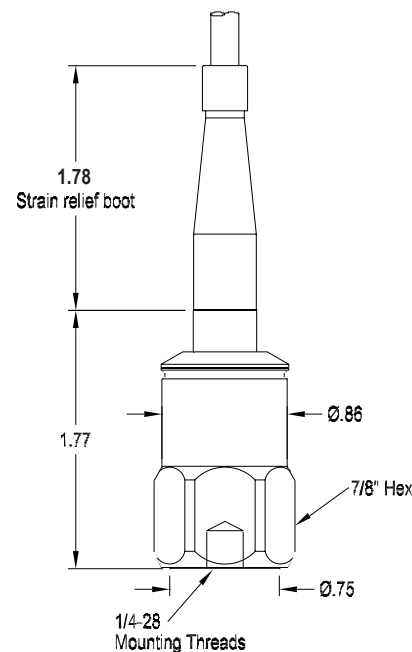

Connections	
Function	Cable conductor
power/signal	white
common	black
case	shield



Note: Due to continuous process improvement, specifications are subject to change without notice.
This document is cleared for public release.