

Radiation resistant velocity transducer

793VR



SPECIFICATIONS


Sensitivity, $\pm 10\%$, 25°C	100 mV/in/sec
Velocity range	50 in/sec peak
Amplitude nonlinearity	2.5%
Frequency response:	
$\pm 10\%$	6.0 - 3,500 Hz
± 3 dB	2.0 - 7,000 Hz
Resonance frequency, mounted, nominal	15 kHz
Transverse sensitivity, max	5% of axial
Temperature response:	
-50°C	-5%
+120°C	+5%
Power requirement:	
Voltage source	18 - 30 VDC
Current regulating diode ¹	2 - 10 mA
Electrical noise, equiv. g, nominal:	
Broadband 2.5 Hz to 25 kHz	100 μ in/sec
Spectral 10 Hz	10 μ in/sec/ $\sqrt{\text{Hz}}$
100 Hz	1.0 μ in/sec/ $\sqrt{\text{Hz}}$
1,000 Hz	0.2 μ in/sec/ $\sqrt{\text{Hz}}$
Output impedance, nominal 4 mA supply	the greater of 5,000/f or 200 Ω
Bias output voltage, nominal	10 VDC
Grounding	case isolated, internally shielded
Temperature range	-50° to +120°C
Vibration limit	250 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv. in/sec	25 μ in/sec/gauss
Sealing	hermetic
Base strain sensitivity	0.0005 in/sec/ μ strain
Radiation exposure limit	1 x 10 ⁷ RADs
Weight	133 grams
Case material	stainless steel
Mounting	1/4-28 tapped hole
Output connector	2 pin, MIL-C-5015 style
Mating connector	R6, R6QN
Recommended cabling	J9T2

Notes: ¹ A maximum current of 6 mA is recommended for operating temperatures in excess of 100°C.
Accessories supplied: SF6 mounting stud; calibration data



Key features

- Radiation rated
- Manufactured in ISO 9001 facility

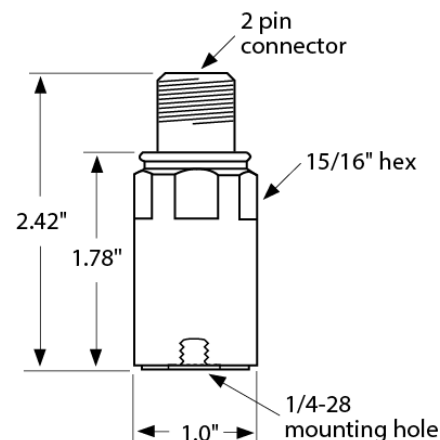

Connections	
Function	Connector pin
power/signal	A
common	B



Note: Due to continuous process improvement, specifications are subject to change without notice.
This document is cleared for public release.