

# Temperature calibrator TP 37200E.2 // TP 37200E.2i

TP Premium // Dry block // -50...200 °C // -58...392 °F



TP 37200E.2



TP 37200E.2i  
Integrated measuring instrument



## Highlights

- Patented control technology - Fastest stabilisation times on the market - Time savings of up to 50 %
- -50...200 °C (-58...392 °F) is the widest temperature range with cooling and heating function on the market
- World's fastest dry-block temperature calibrator
- Unique hybrid technology: combination of high-performance resistance heating with Peltier elements specially optimised for the cooling process for fastest cooling and heat-up times
- Patented touch screen function for simple and convenient operation
- Accessories: device under test management with barcode scanner
- Available with integrated measuring instrument → TP 37200E.2i

## TP Premium

The calibrators of the TP Premium series are characterised by their **unparalleled performance** and **outstanding operating comfort**. By means of the **intuitive menu structure**, all necessary inputs can be made quickly and easily. The **large touch screen** has plenty of room to display the reference, target and devices under test temperatures. At the end of a calibration process, the

TP Premium **provides the complete calibration certificate**. The continuously growing bandwidth of supported temperature ranges supports an increasing number of temperature sensors on the market. They can be calibrated with a resolution of 0.001 °C / K and thus meet the highest requirements, e.g. of the **food and pharmaceuticals industry**.

## SIKA temperature calibrators

Temperature calibrators are used for the verification of the functionality and calibration of temperature measuring devices and temperature sensors. As the sole German manufacturer of these devices, we develop and produce our "Made in Germany" temperature calibrators with a special focus on **long-term reliability** and **utmost accuracy** in combination with **easy operation**. We can rely on more than 40 years of experience in doing this: SIKA's **first dry block temperature calibrator** was launched all the way back in 1980.

Every SIKA temperature calibrator is meticulously tested for **accuracy** and **stability**. This is attested by our standard calibration certificate, which we issue with every temperature calibrator, or by means of an optional DAkkS calibration certificate [German accreditation body]. This is to guarantee that you receive a **perfect product** which can be traced back to national and international temperature measurement standards.

# Features



## Touch screen with robust glass surface


- Simple operation of the temperature calibrator via the integrated 7" touchscreen
  - Intuitive operation of the calibration functions
  - Management of calibration data directly on the calibrator
- Glass surface made of multi-pane safety glass
  - Extremely resistant to damage
  - Easy cleaning of the surface
  - Suitable for use in the food industry

## TP OS operating system

Our TP OS operating system with its clear display allows you to see all the important information at a glance.

### Our operating system also offers:

- Completely paperless calibration
  - No calculation and transmission errors
- Future-proof through updates
- The option of remote maintenance
- Operating and explanatory videos with sound and text
- DCC ready

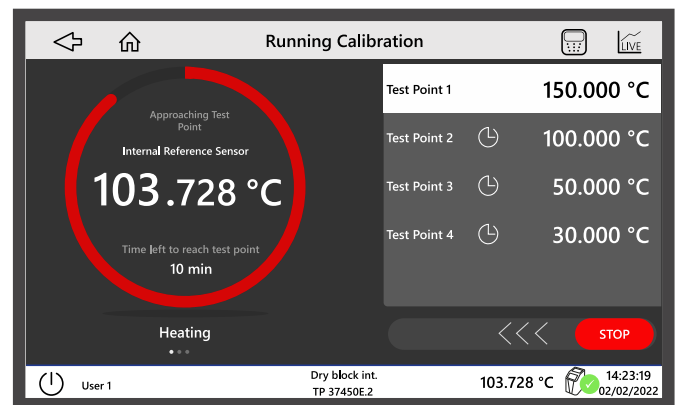

## Automatic calibration with camera

In calibration processes for devices under test with their own temperature display, the display of the DUT must be read for each calibration point. The read value is transferred by the user to the calibrator or the calibration certificate, and the subsequent calibration point is only approached after a manual acknowledgement. For this purpose, the user must return to the calibrator at each calibration point. In some cases, this can lead to long delays if the user carries out other tasks in between. With our automatic calibration with a camera, these time-intensive intermediate steps are no longer needed:


- The patented camera system automatically creates a recording of the DUT display at each calibration point. The subsequent calibration point is approached directly afterwards
  - No user interaction is required during the calibration process, as it is implemented automatically
  - All test points are approached without waiting times
- Upon completion of the entire calibration process, the user transmits the data of the created display records to the calibrator or calibration certificate
  - During the entire calibration process, the user is free to carry out other tasks
- The visual records of the device under test display at each calibration point are saved and attached to the calibration certificate as verification



# Features

## Temperature control with "rocket controller"

- Temperature regulator with model-based state control
- Special regulation algorithm based on knowledge and experience from space travel
- Unique temperature stability of  $< 0.001\text{ }^{\circ}\text{C} / \text{K}$
- Anticipatory activation of the heating and cooling elements
  - The settling time to the target temperature is reduced by approx. 90% at each calibration point
  - Time savings of up to 50% with each calibration process

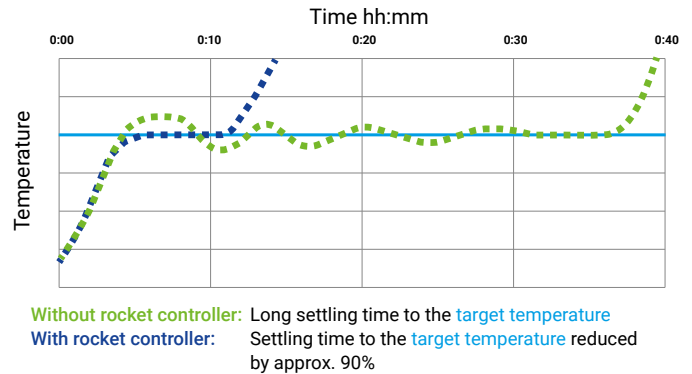

## Unique hybrid technology

- The best of two worlds: With our unique hybrid technology, we combine the benefits of a powerful resistance heating with special Peltier elements that have been optimised for the cooling process.
- All heating and cooling processes of the temperature calibrator are significantly accelerated.
  - Time and cost savings with every calibration
  - Reduced standstill times in your company

## WebApp - Plug and play for your temperature calibrator

- With the WebApp, ongoing or completed calibration processes can be comfortably displayed on a PC or a smart phone
- The connection is made via LAN or WLAN (via router)
- The WebApp is opened via the browser of your PC or mobile phone. Installation of drivers or software is not required
- Compatible with all current operating systems (Windows, Mac OS, Linux, iOS and Android)



## 5-Year Warranty: Low Maintenance, Comprehensive Service!

With regular service and adherence to the SIKA recalibration recommendation, you receive a 5-year warranty.

- Instead of annual recalibration, recalibration is only necessary every 500 operating hours or every three years thanks to long-lasting SIKA technology.
- This results in only 1/3 of the usual maintenance costs.
- Significant reduction in the total cost of ownership.

# Technical data

| TP 37200E.2 / TP 37200E.2i                                         |                                                                                                                                                                                                 |            |                                       |           |
|--------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------------------------|-----------|
| Temperature range                                                  | -50...200 °C at ambient temperature 20 °C      -31...329 °F at ambient temperature 68 °F<br>Lower temperatures possible with reduced ambient temperature.                                       |            |                                       |           |
| Dimension of the calibration insert                                | Ø 28 x 150 mm (calibration insert easily exchangeable)                                                                                                                                          |            |                                       |           |
| Dry block                                                          | External reference temperature sensor                                                                                                                                                           |            | Internal reference temperature sensor |           |
| Display accuracy                                                   | ±0.10 °C                                                                                                                                                                                        | ±0.18 °F   | ±0.27 °C                              | ±0.486 °F |
| Temperature stability                                              | ±0.003 °C                                                                                                                                                                                       | ±0.0054 °F | ±0.020 °C                             | ±0.036 °F |
| Temperature distribution                                           |                                                                                                                                                                                                 |            |                                       |           |
| → Axial                                                            | ±0.250 °C                                                                                                                                                                                       |            | ±0.450 °F                             |           |
| → Radial                                                           | ±0.070 °C                                                                                                                                                                                       |            | ±0.126 °F                             |           |
| Influence of load                                                  | ±0.070 °C                                                                                                                                                                                       | ±0.126 °F  | ±0.220 °C                             | ±0.396 °F |
| Stabilisation time<br>(with external reference temperature sensor) |                                                                                                                                                                                                 |            |                                       |           |
| → to ±0.05°C                                                       | → to ±0.09 °F                                                                                                                                                                                   |            | From 1 min<br>From 5 min              |           |
| → to ±0.005°C                                                      | → to ±0.009 °F                                                                                                                                                                                  |            |                                       |           |
| Heating time (without calibration insert)                          |                                                                                                                                                                                                 |            |                                       |           |
| → 20 °C...200 °C                                                   | → 68...392 °F                                                                                                                                                                                   |            | 9 min<br>12 min                       |           |
| → -50 °C...200 °C                                                  | → -58...392 °F                                                                                                                                                                                  |            |                                       |           |
| Cooling time (without calibration insert)                          |                                                                                                                                                                                                 |            |                                       |           |
| → 20 °C...-50 °C                                                   | → 68...-58 °F                                                                                                                                                                                   |            | 35 min<br>18 min                      |           |
| → 200 °C...20 °C                                                   | → 329...68 °F                                                                                                                                                                                   |            |                                       |           |
| Resolution of the temperature display                              | 0.001 °C                                                                                                                                                                                        |            | 0.001 °F                              |           |
| Hysteresis                                                         | ±0.010 °C                                                                                                                                                                                       |            | ±0.018 °F                             |           |
| Temperature units                                                  | °C / °F / K (selectable)                                                                                                                                                                        |            |                                       |           |
| Reference temperature sensor                                       | internal, fixed installation / external (selectable)                                                                                                                                            |            |                                       |           |
| Interfaces                                                         | Ethernet, 3 x USB                                                                                                                                                                               |            |                                       |           |
| Connectivity                                                       | OPC UA, HTTP, serial communication. Details and further possibilities on request.                                                                                                               |            |                                       |           |
| Dimensions                                                         |                                                                                                                                                                                                 |            |                                       |           |
| → Width                                                            | 210 mm                                                                                                                                                                                          |            |                                       |           |
| → Height                                                           | 380 + 50 mm (Handle)                                                                                                                                                                            |            |                                       |           |
| → Depth                                                            | 300 mm                                                                                                                                                                                          |            |                                       |           |
| Weight                                                             | Approx. 15 kg                                                                                                                                                                                   |            |                                       |           |
| Power supply                                                       | 90...240 VAC, 50 / 60 Hz                                                                                                                                                                        |            |                                       |           |
| Power consumption                                                  | Approx. 555 W                                                                                                                                                                                   |            |                                       |           |
| Adjustable temperature range                                       | -60...200 °C                                                                                                                                                                                    |            | -76...392 °F                          |           |
| Display                                                            | Brilliant color touchscreen (7 inches), multi panel safety glass                                                                                                                                |            |                                       |           |
| Approvals                                                          |                                                                                                                                                                                                 |            |                                       |           |
|                                                                    | <div>CE</div> <div><div><div></div><div>RoHS</div></div><div><div></div><div>REACH</div><div>COMPLIANT</div></div></div> <div>EAC</div> <div>UK<br/>CA</div> <div><div></div><div>G</div></div> |            |                                       |           |

# The integrated measuring instrument in detail

Resistance thermometers, thermocouples and signals from temperature transmitters must be operated with an external measuring instrument which measures the output signals and displays them as temperature during the calibration. This temperature can then be compared to the set calibrator temperature.

Our integrated measuring instrument assumes the tasks of an external measuring instrument. It shows the temperature directly on the calibrator display and enables the fully automatic calibration of two devices under test at the same time.

## Your benefits of the integrated measuring instrument at a glance:

- Temperature sensor calibration without additional measuring instrument
- Simultaneous calibration of several temperature sensors
- Fully automatic calibration and certification
- Enables the simplification of your work processes
- Offers great time savings compared to a temperature calibrator without integrated measuring instrument

## The following DUTs can be connected to the integrated measuring instrument:

- Resistance thermometer (RTD): Pt100, Pt500 and Pt1000 in 2-, 3- or 4-wire circuit
- Thermocouples (TC) of the types K, J, N, E, R, T, B, S, L and U
- 0(4)...20 mA current signals from temperature transmitters (mA), with and without supply voltage
- 0...10 V voltage signals
- Temperature switch (switch) with normally open and normally closed contacts



# Temperature calibrator TP 37200E.2i // Integrated measuring instrument


## Technical data

| Device under test inputs - Resistance thermometers |                                   |           |
|----------------------------------------------------|-----------------------------------|-----------|
| Number of channels                                 | 2                                 |           |
| Connection                                         | 4 mm safety socket, 4 per channel |           |
| Connection type                                    | 2-, 3-, 4-wire technology         |           |
| Resistance range                                   |                                   |           |
| → Pt100                                            | 0...400 Ω                         |           |
| → Pt1000                                           | 0...4000 Ω                        |           |
| Accuracy                                           |                                   |           |
| → Pt100                                            | ±0.03 °C                          | ±0.054 °F |
| → Pt500                                            | ±0.12 °C                          | ±0.216 °F |
| → Pt1000                                           | ±0.06 °C                          | ±0.108 °F |
| → Ni100                                            | ±0.02 °C                          | ±0.036 °F |
| → Ni500                                            | ±0.08 °C                          | ±0.144 °F |
| → Ni1000                                           | ±0.04 °C                          | ±0.072 °F |
| Device under test inputs - Thermocouple            |                                   |           |
| Number of channels                                 | 2                                 |           |
| Connection                                         | 2x thermocouple socket (mini)     |           |
| Measuring range                                    | -10...100 mV                      |           |
| Accuracy cold junction                             | ±0.3 °C                           | ±0.054 °F |
| Accuracy                                           |                                   |           |
| → Type K                                           | ±0.08 °C                          | ±0.144 °F |
| → Type J                                           | ±0.07 °C                          | ±0.126 °F |
| → Type N                                           | ±0.13 °C                          | ±0.234 °F |
| → Type E                                           | ±0.06 °C                          | ±0.108 °F |
| → Type T                                           | ±0.09 °C                          | ±0.162 °F |
| → Type R                                           | ±0.78 °C                          | ±1.404 °F |
| → Type S                                           | ±0.73 °C                          | ±1.314 °F |
| → Type B                                           | ±0.5 °C                           | ±0.9 °F   |
| Standard signal input (Current)                    |                                   |           |
| Number of channels                                 | 1                                 |           |
| Connection                                         | 4 mm safety socket                |           |
| Measuring range                                    | 0...24 mA                         |           |
| Accuracy                                           | 0.01 % of range                   |           |
| Standard signal input (Voltage)                    |                                   |           |
| Number of channels                                 | 1                                 |           |
| Connection                                         | 4 mm safety socket                |           |
| Measuring range                                    | 0...12 VDC                        |           |
| Accuracy                                           | 0.01 % of range                   |           |
| Switch test                                        |                                   |           |
| Number of channels                                 | 2                                 |           |
| Transmitter supply                                 |                                   |           |
| Output current                                     | Max. 24 mA                        |           |
| Output voltage                                     | 24 VDC                            |           |
| General technical data                             |                                   |           |
| Annual drift of all measuring inputs               | Max. 30% of accuracy              |           |


# Temperature steps TP 37200E.2

with external reference temperature sensor

Step test with commercially established limit temperatures and 15 minutes additional holding time after stabilization.

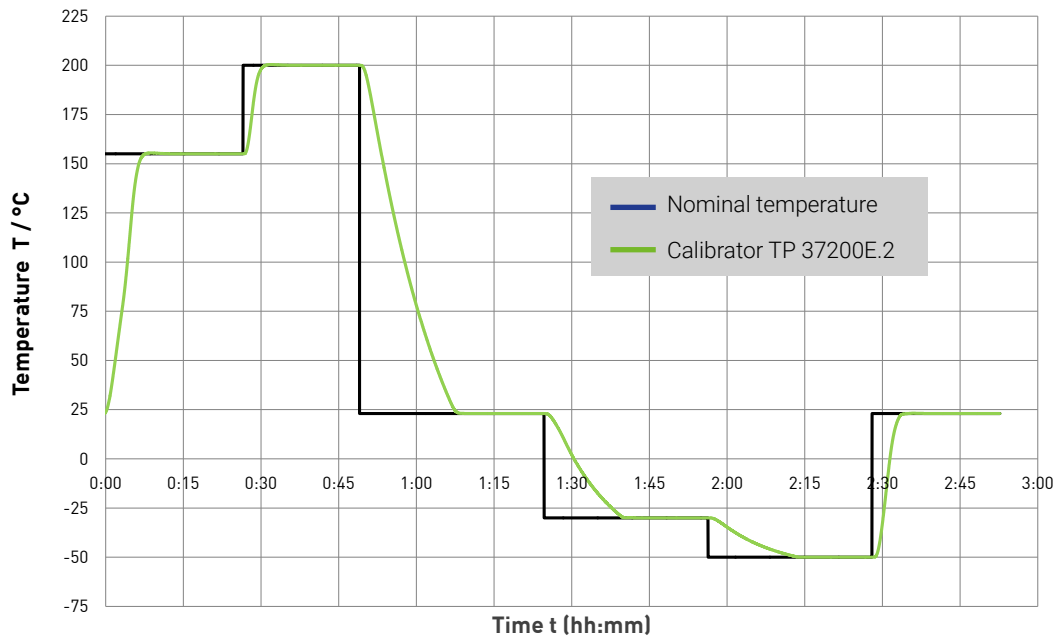

Detailed image from step test: Fast settling to  $\pm 0.005$  °C.

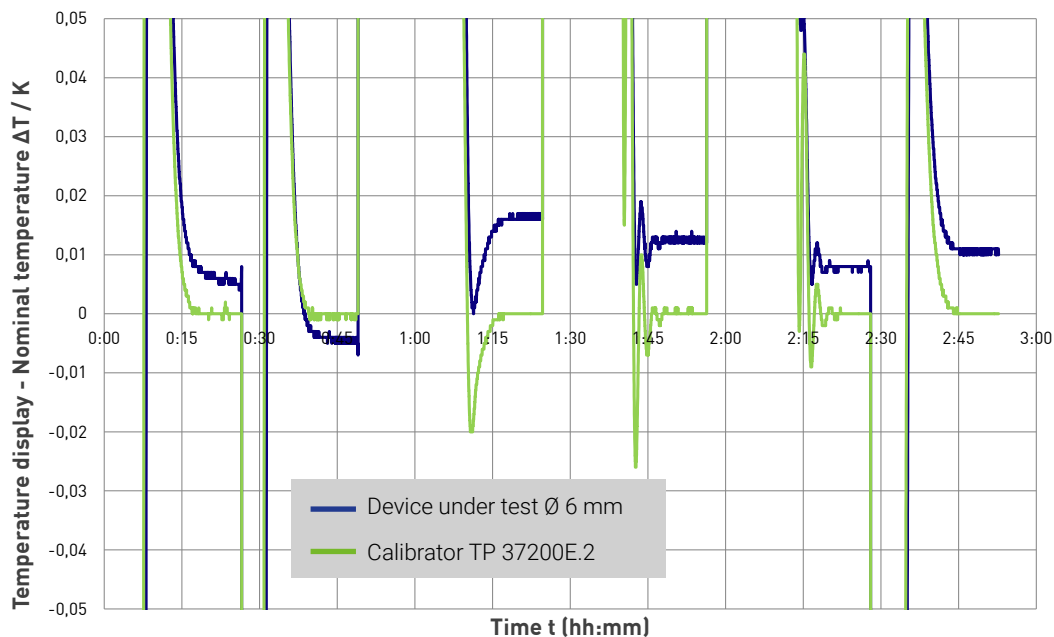

# Article numbers

To order a complete calibrator, you need three article numbers:

1. Calibrator
2. Linearisation
3. Calibration insert

In addition, depending on your individual calibration requirements, you can order additional calibration inserts, necessary certificates and other accessories.

| 1. Calibrator                |           |                         |              |                                 |                |         |
|------------------------------|-----------|-------------------------|--------------|---------------------------------|----------------|---------|
| Temperature range            | Function  | Calibration insert [mm] | Power supply | Integrated measuring instrument | Article number |         |
| -50...200 °C    -58...392 °F | Dry block | Ø 28 x 150              | 110...240 V  | Without                         | EP3720 0       | 22815U3 |
| -50...200 °C    -58...392 °F | Dry block | Ø 28 x 150              | 110...240 V  | With                            | EP3720 I       | 22815U3 |

| 2. Linearisation             |  |  |       |    |              |
|------------------------------|--|--|-------|----|--------------|
| Linearisation                |  |  |       |    |              |
| With linearisation           |  |  | EPLIK |    |              |
| Function                     |  |  |       |    |              |
| Dry block                    |  |  | DB    |    |              |
| Reference temperature sensor |  |  |       |    |              |
| Internal                     |  |  |       | I  |              |
| External                     |  |  |       | E  |              |
| Alignment to medium          |  |  |       |    |              |
| No Medium                    |  |  |       |    | 00           |
| Test points                  |  |  |       |    |              |
| Standard                     |  |  |       |    | 0            |
| Customer-specific            |  |  |       |    | K            |
| Example article number       |  |  | EPLIK | DB | I    00    0 |

| 3. Calibration insert                          |           |                         |          |                      |
|------------------------------------------------|-----------|-------------------------|----------|----------------------|
| Bore holes [mm]                                | Function  | Calibration insert [mm] | Material | Article number       |
| 1x Ø 3.5, 1x Ø 6.5, 1x Ø 13.5                  | Dry block | Ø 28 x 150              | Brass    | EZ15028B03MS17       |
| 1x Ø 6.5                                       | Dry block | Ø 28 x 150              | Brass    | EZ15028065MS00       |
| 2x Ø 3.5                                       | Dry block | Ø 28 x 150              | Brass    | EZ15028B02MS09       |
| 1x Ø 3.5, 1x Ø 4.5                             | Dry block | Ø 28 x 150              | Brass    | EZ15028F02MS80       |
| 1x Ø 3.5, 1x Ø 6.5                             | Dry block | Ø 28 x 150              | Brass    | EZ15028H02MS01       |
| 1x Ø 3.5, 1x Ø 8.5                             | Dry block | Ø 28 x 150              | Brass    | EZ15028B02MS67       |
| 1x Ø 3.5, 1x Ø 6.5, 1x Ø 8.5, 1x Ø 10.5        | Dry block | Ø 28 x 150              | Brass    | EZ15028C04MS15       |
| Without bore holes                             | Dry block | Ø 28 x 150              | Brass    | EZ15028000MS00       |
| Calibration insert incl. 1 bore hole of choice | Dry block | Ø 28 x 150              | Brass    | Please indicate bore |
| Each additional bore hole                      | Dry block | Ø 28 x 150              | Brass    | holes in the order   |

## Article numbers

| 4. Calibration certificate - Select your calibration certificates as needed<br>Each calibrator is already delivered with a standard calibration certificate (6 test points). | Article number  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| SIKA works calibration certificate (Dry block with internal reference temperature sensor)                                                                                    | EKWPEPLIKDBI    |
| SIKA works calibration certificate (Dry block with external reference temperature sensor)                                                                                    | EKWPEPLIKDBE    |
| DAkKS calibration certificate (Dry block with internal reference temperature sensor)                                                                                         | EKDAKKSEPLIKDBI |
| DAkKS calibration certificate (Dry block with external reference temperature sensor)                                                                                         | EKDAKKSEPLIKDBE |
| Each additional test point DAkKS calibration certificate                                                                                                                     | EKTPDAKKSZUSP   |
| SIKA works calibration certificate integrated measuring instrument (Pt100, type K)                                                                                           | EKTPWPMI1       |
| SIKA works calibration certificate integrated measuring instrument (Pt100, Pt1000 type K, type J)                                                                            | EKTPWPMI2       |
| SIKA works calibration certificate integrated measuring instrument (Pt100, type K, mA, V)                                                                                    | EKTPWPMI3       |
| SIKA works calibration certificate integrated measuring instrument (Pt100, Pt1000 type K, type J, mA, V)                                                                     | EKTPWPMI4       |
| SIKA works calibration certificate for each additional measurement input of your choice (Pt500, Pt1000, type J/N/E/T/R/S, mA, V)                                             | EKTPWPMIZUS     |
| SIKA works calibration certificate complete (Pt100, Pt500, Pt1000, type K/J/N/E/T/R/S, mA, V)                                                                                | EKTPWPMIKOMPL   |
| DAkKS calibration certificate integrated measuring instrument (Pt100, type K)                                                                                                | EKTPDAKKSMI1    |
| DAkKS calibration certificate integrated measuring instrument (Pt100, Pt1000 type K, type J)                                                                                 | EKTPDAKKSMI2    |
| DAkKS calibration certificate integrated measuring instrument (Pt100, type K, mA, V)                                                                                         | EKTPDAKKSMI3    |
| DAkKS calibration certificate integrated measuring instrument (Pt100, Pt1000 type K, type J, mA, V)                                                                          | EKTPDAKKSMI4    |
| DAkKS calibration certificate for each additional measurement input of your choice (Pt500, Pt1000, type J/N/E/T/R/S, mA, V)                                                  | EKTPDAKKSIMIZUS |
| DAkKS calibration certificate complete (Pt100, Pt500, Pt1000, type K/J/N/E/T/R/S, mA, V)                                                                                     | EKTPDAKSKOMPL   |

| 5. Accessories                                                                               | Article number   |
|----------------------------------------------------------------------------------------------|------------------|
| Transport case without trolley                                                               | EZTPKOFFER20     |
| Transport case with trolley                                                                  | EZTPKOFFER20TG   |
| External reference temperature sensor TF 255 (-50...255 °C / -58...491 °F)                   | W033P413000GX0R2 |
| External reference temperature sensor TF 255 (-50...255 °C / -58...491 °F), 90° angle        | W033P413000GX0RI |
| Network switch                                                                               | XE2103           |
| Barcode scanner                                                                              | XE2102           |
| W-LAN router                                                                                 | XE2101           |
| USB Camera for DUT monitoring                                                                | XE2375           |
| Camera holder for USB Camera                                                                 | XE2370           |
| DUT temperature sensor for demo purposes (Pt100 3-phase) for integrated measuring instrument | WMQMP31020050003 |
| Instruction in the temperature calibrator by SIKA field service                              | EKTPEINWEISUNG   |
| Frame packaging for return of calibrator (e.g. for recalibration)                            | 098V             |
| Please indicate the calibrator model when ordering.                                          |                  |

# Overview of SIKA temperature calibrators

## Our series: Basic. Solid. Premium.

- **Dry block calibrators** of the **TP Basic** series impress with their **uncomplicated operation** and **high cost-effectiveness**. They are particularly suitable for use on ships or in industrial applications.
- Equipped with a **PC interface**, the **dry block calibrators** and **calibration baths** of the **TP Solid** series cover a wide temperature range with high accuracy.
- For the highest demands on accuracy and flexibility: The dry-block and multi-function temperature calibrators of the **TP Premium** series represent the pinnacle of our technical development. Equipped with an **integrated touch screen**, a **PC interface**, an **external reference sensor** and **integrated measuring instrument**, this series offers **extreme accuracies** for **all calibration tasks**.

| Temperature range<br>(RT=Room temperature)           | Function          | Accuracy |           | Features   | Block dimensions<br>[Ø mm x depth mm] | Type                   |
|------------------------------------------------------|-------------------|----------|-----------|------------|---------------------------------------|------------------------|
| <b>-50 °C ... 200 °C</b><br><b>-58 °F ... 392 °F</b> | Dry block         | ±0.4 °C  | ±0.72 °F  | TP Basic   | 28 x 150                              | <b>TP 17200</b>        |
|                                                      | Dry block         | ±0.2 °C  | ±0.36 °F  | TP Solid   | 28 x 150                              | <b>TP 17200S</b>       |
|                                                      | Dry block         | ±0.1 °C  | ±0.18 °F  | TP Premium | 28 x 150                              | <b>TP 37200E.2</b>     |
| <b>-35 °C ... 165 °C</b><br><b>-31 °F ... 329 °F</b> | Dry block         | ±1 °C    | ±1.8 °F   | TP Basic   | 28 x 150                              | <b>TP 17165M</b>       |
|                                                      | Dry block         | ±0.4 °C  | ±0.72 °F  | TP Basic   | 28 x 150                              | <b>TP 17165</b>        |
|                                                      | Dry block         | ±0.2 °C  | ±0.36 °F  | TP Solid   | 28 x 150                              | <b>TP 17165S</b>       |
|                                                      | Dry block         | ±0.1 °C  | ±0.18 °F  | TP Premium | 28 x 150                              | <b>TP 37165E.2</b>     |
| <b>-30 °C ... 155 °C</b><br><b>-22 °F ... 311 °F</b> | Calibration bath  | ±0.1 °C  | ±0.18 °F  | TP Solid   | 60 x 170                              | <b>TP M165S</b>        |
| <b>-30 °C ... 165 °C</b><br><b>-22 °F ... 329 °F</b> | Dry block         | ±0.4 °C  | ±0.72 °F  | TP Basic   | 60 x 150                              | <b>TP 17166</b>        |
|                                                      | Dry block         | ±0.2 °C  | ±0.36 °F  | TP Solid   | 60 x 150                              | <b>TP 17166S</b>       |
|                                                      | Dry block         | ±0.1 °C  | ±0.18 °F  | TP Premium | 60 x 170                              | <b>TP 3M165E.2</b>     |
|                                                      | Air Shield Insert | ±0.07 °C | ±0.126 °F |            |                                       |                        |
|                                                      | Calibration bath  | ±0.19 °C | ±0.342 °F |            |                                       |                        |
|                                                      | Infrared Surface  | ±0.5 °C  | ±0.9 °F   |            |                                       |                        |
| <b>-10 °C ... 100 °C</b><br><b>14 °F ... 212 °F</b>  | Dry block         | ±0.05 °C | ±0.09 °F  | TP Solid   | 7 x 6.5 x 150                         | <b>TP 17Zero</b>       |
|                                                      | Dry block         | ±1 °C    | ±1.8 °F   | TP Basic   | 18 x 150                              | <b>TP 18200E</b>       |
| <b>RT ... 255 °C</b><br><b>RT ... 491 °F</b>         | Calibration bath  | ±0.2 °C  | ±0.36 °F  | TP Solid   | 60 x 170                              | <b>TP M255S</b>        |
|                                                      | Dry block         | ±0.25 °C | ±0.45 °F  | TP Premium | 60 x 170                              | <b>TP 3M255E.2</b>     |
|                                                      | Air Shield Insert | ±0.08 °C | ±0.144 °F |            |                                       |                        |
|                                                      | Calibration bath  | ±0.18 °C | ±0.324 °F |            |                                       |                        |
|                                                      | Infrared Surface  | ±0.5 °C  | ±0.9 °F   |            |                                       |                        |
| <b>RT ... 450 °C</b><br><b>RT ... 842 °F</b>         | Dry block         | ±0.6 °C  | ±1.08 °F  | TP Basic   | 60 x 150                              | <b>TP 17450</b>        |
|                                                      | Dry block         | ±0.3 °C  | ±0.54 °F  | TP Solid   | 60 x 150                              | <b>TP 17450S</b>       |
|                                                      | Dry block         | ±0.25 °C | ±0.45 °F  | TP Premium | 60 x 150                              | <b>TP 37450E.2</b>     |
|                                                      | Air Shield Insert | ±0.2 °C  | ±0.36 °F  |            |                                       |                        |
|                                                      | Infrared Surface  | ±0.5 °C  | ±0.9 °F   |            |                                       |                        |
| <b>RT ... 650 °C</b><br><b>RT ... 1202 °F</b>        | Dry block         | ±1 °C    | ±1.8 °F   | TP Basic   | 28 x 150                              | <b>TP 17650M</b>       |
|                                                      | Dry block         | ±0.8 °C  | ±1.44 °F  | TP Basic   | 28 x 150                              | <b>TP 17650</b>        |
|                                                      | Dry block         | ±1.2 °C  | ±2.16 °F  | TP Basic   | 13.5 x 110                            | <b>TP Basic Marine</b> |
|                                                      | Dry block         | ±0.4 °C  | ±0.72 °F  | TP Solid   | 28 x 150                              | <b>TP 17650S</b>       |
|                                                      | Dry block         | ±0.43 °C | ±0.744 °F | TP Premium | 29 x 150                              | <b>TP 37700E.2</b>     |
| <b>RT ... 700 °C</b><br><b>RT ... 1292 °F</b>        | Air Shield Insert | ±0.27 °C | ±0.486 °F |            |                                       |                        |
| <b>RT ... 850 °C</b><br><b>RT ... 1562 °F</b>        | Dry block         | ±1 °C    | ±1.8 °F   | TP Basic   | 18 x 100                              | <b>TP 18850E</b>       |

Subject to technical modifications and errors