



CRY3213

1/2" NVH Outdoor Rugged Microphone



Features

- Features**

Sensitivity	50 mV/Pa
Dynamic Range	17 dBA - 136 dB
Frequency Range	3.15 Hz-20 kHz ± 2 dB

- Applications**

Optimisation of Vehicle Interior Quietness
Powertrain Noise Reduction
Detection and Elimination of Abnormal Noises High-Temperature Environmental Testing

- Standards**

IEC 61094 4:1995 Measurement microphones - Part 4

Introduction

The CRY3213 is a high-precision microphone specifically engineered for demanding NVH (Noise, Vibration, and Harshness) testing scenarios. Featuring IP67-rated protection and an extended operating temperature range of -50°C to 125°C, it excels in harsh environments with humidity, dust, particulate contamination, and extreme temperatures, ensuring stable and reliable data acquisition.

Check out our Microphone Selection Guide

acsoft.co.uk/microphone-selection-tool

Highlights

- Rugged Design**

CRY3213 NVH Measurement Microphone is engineered for durability with stable sensitivity performance even in harsh testing environments.

- Waterproof & Dustproof**

Safe for use in humid or splashing environments, compliant with IP67 standards.

- Power Indicator**

Provides visual confirmation upon power-up for convenient operation.

- Extreme Temperature Performance**

Designed for extreme conditions, operating temperature range: -50 °C to 125 °C, ensuring accurate measurements in demanding environments.

- Shock Resistance**

The product effectively mitigates risks from accidental drops and mechanical vibrations, ensuring long-term reliability of automotive test data.

Key performance metrics include: Shock resistance up to 1000 m/s², vibration resistance up to 80 m/s².

- EMC Immunity**

The CRY3213 NVH measurement microphone meets both conducted and radiated disturbance immunity standards, complying with IEC 61000-4 requirements, making it suitable for harsh electromagnetic environments.

- Compatibility**

CRY3213 NVH measurement microphone requires an IEPF constant current power supply module with 2mA-20mA constant current output and 24V open-circuit voltage.

- Calibration**

Factory-calibrated using traceable calibration equipment, with a calibration certificate included. Annual recalibration is recommended.

Technical Specifications

Specifications

Field Type	Free-field
Sensitivity (± 3 dB)	50 mV/Pa, -26 dB re 1V/Pa
Frequency Response	3.15 Hz 20 kHz ± 2 dB
Dynamic Range (re.20uPa)	17 - 136 dB
Inherent Noise	17 dBA
Dynamic range upper limit	136 dB (THD<3%)
Polarization Voltage	0 V
Capacitance@250Hz	15pF
Pressure Equalization Vent	Rear vented
Output Impedance	< 50 Ω
Maximum Output Voltage	>8.0 Vp
Power Supply	IEPE(2 - 20mA, Typical: 4 mA)
DC Bias Voltage	12 V \pm 2 V
Interface Type	BNC
Operating Temperature	-50 $^{\circ}$ C - +125 $^{\circ}$ C
Storage Temperature	-25 $^{\circ}$ C - +70 $^{\circ}$ C
Operating Humidity	0-90% RH no condensation
Temperature Coefficient	-0.008 dB/ $^{\circ}$ C, 0.004 dB/ $^{\circ}$ F
Humidity Stability	<0.1dB(0 to 90%RH no condensation)
Static Pressure Stability	-0.01 dB/kPa
Protection Rating	IP67
TEDS	IEEE 1451.4
Shock Resistant	1000 m/s ²
Vibration Resistant	80 m/s ²
EMC Immunity Standard	IEC 61000-4-6: 2013 IEC 61000-4-3: 2020

Ordering information

Consisting of

Microphone	CRY3213 NVH Weatherproof Test Microphone
Calibrator Adapter	Compared to the standard microphone top grid, the CRY3213 has a slightly larger protective grid, requiring a dedicated calibration adapter.
Replaceable Protective Grid	Equipped with a standard protective grid for convenient measurement

Frequency Response

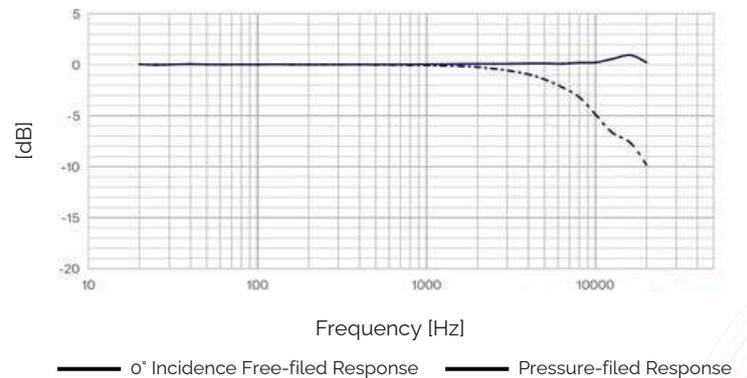


Fig.1 CRY3213 NVH Ruggedized Measurement Microphone

Dimensions

Height with Grid	92 mm (3.6")
Diameter with Grid	14.5 mm (0.6")

Drawings (mm) [inch]

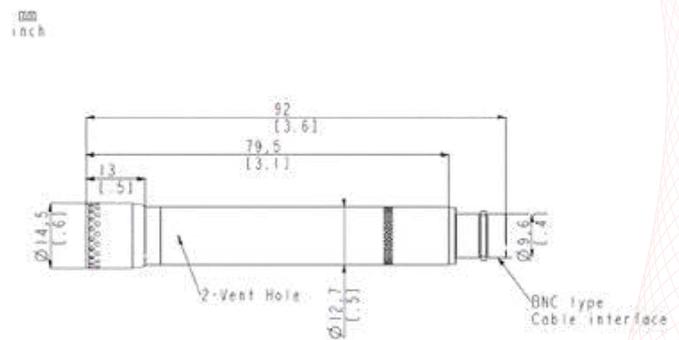


Fig.2 CRY3213 NVH Ruggedized Measurement Microphone Drawings